



Address: Jetparada Road, At: Bhojapara, Ta: Wankaner, Gujarat-363621, India

Contact: +91 90993 88888 | info@qraxceramic.com

Website: www.qraxceramic.com

1004 - QRAX-1004

QRAX Ceramic Series 1004 is a premium 300×600 mm digital wall tile collection designed to elevate modern interiors. Featuring a rich combination of glossy marble texture and artistic decorative patterns, this series is perfect for bathrooms, wash areas, and stylish wall applications. The set includes Light (L), Dark (D), and Highlight (HL-1) tiles, allowing you to create elegant contrast and designer walls with a seamless finish. High-quality digital printing ensures long-lasting shine, easy maintenance, and a luxurious look.

Size: 12IN x 24IN |

Type: Ceramic Tiles |

Surface: Polished |


Color:




**300x
600mm**

DIGITAL WALL TILES

GLOSSY

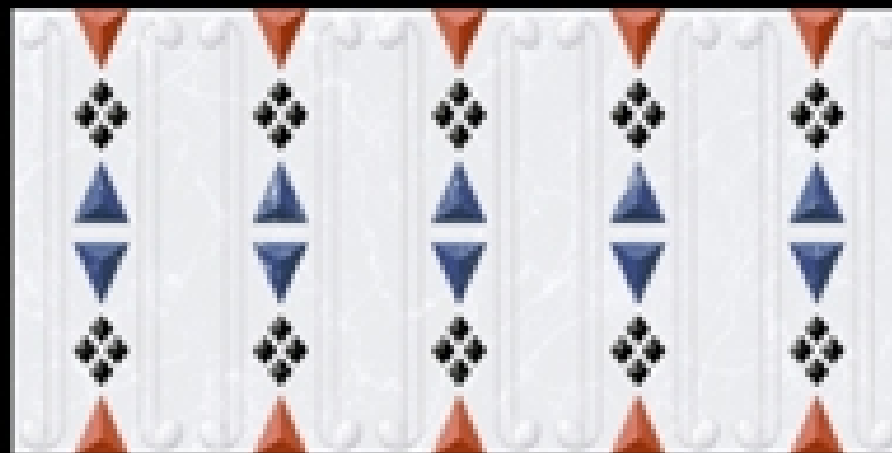

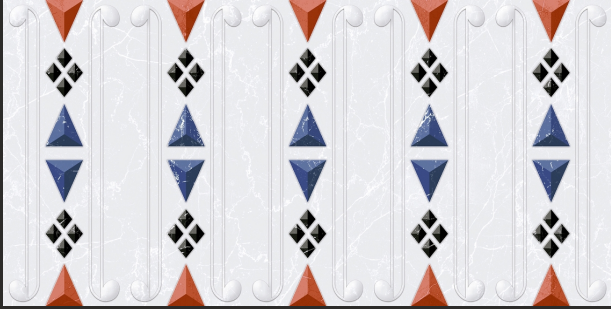

Features



Water Resistance



Durability



Heat Resistance



Cost-Effective



Variety of Designs

Application



Bedroom



Bathroom



Kitchen



Livingroom



Out door

SPECIFICATION

TECHNICAL SPECIFICATIONS - GLAZED PORCELAIN - MATT, MATT WITH STRCTURE, ROCKER TILES			
CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411	OUR VALUE	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	± 0.5%	± 0.1%	ISO-10545-2
Deviation in thickness	± 5.0%	± 4.0%	ISO-10545-2
Straightness in sides	± 0.5%	± 0.1%	ISO-10545-2
Rectangularity	± 0.5%	± 0.1%	ISO-10545-2
Surface flatness	± 0.5%	± 0.2%	ISO-10545-2
Surface quality	Min. 95% defect free	> 95%	ISO 10545-2
STRUCTURAL PROPERTIES			
Water absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.20 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of rupture	> 35 N/mm ²	> 40 N/mm ²	ISO-10545-4
Breaking strength	> 1300 N	> 1800 N	ISO-10545-4
Impact resistance (COR)	>0.55	>0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES			
Surface abrasion resistance	Declared class	Class PEI 4 (2100 revolutions)	EN 154
Surface scratch hardness (Mohs scale)	5	5	EN 101
THERMO HYGROMETRIC PROPERTIES			
Frost resistance	Test passed in accordance with test method	Pass	ISO-10545-12
Thermal shock resistance	Min. 10 cycle	Pass	ISO-10545-9
Moisture expansion	0.06mm/m	0.01mm/m	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10	Max. 6.5 x 10	ISO-10545-8
Crazing resistance	No damage	No damage	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Min. Class 3	Class 5	ISO-10545-14
SEFETY PROPERTIES			
Slip resistance (COF)	Declared value	> 0.40 dry, > 0.40 wet	ISO-10545-17
Reaction to fire	Class A1 or A1fl	Class A1 - A1fl	N.A.

Thank you

Address: Jetparada Road, At: Bhojapara, Ta: Wankaner, Gujarat-363621, India

Contact: +91 90993 88888 | info@qraxceramic.com

Website: www.qraxceramic.com